



**HUANRUI**

**北京环瑞商贸有限公司**

BEIJING HUANRUI Co., Ltd

# VP-230 伸縮管 Expansion Joint

- Suitable for straight pipe run over 30m and fluid varying temperature over 17°C
- Every 25m install one piece
- 適用直管長超過30m流體溫度變化量超過17度C的環境
- 每25m裝設一支伸縮管


Type 品號	Size 尺寸	Standard 規格	Material 材質	O-ring "O"環	End type 接口
VP-230	1/2"~2"	ANSI	PVC	EPDM, FPM	Socket, Threaded
VP-230 Fabricated	2-1/2"~2"	ANSI, JIS	PVC	EPDM, FPM	Socket, Threaded
VP-231	1/2"~2"	ANSI	CPVC	EPDM, FPM	Socket, Threaded
VP-231 Fabricated	2-1/2"~2"	ANSI, JIS,	CPVC	EPDM, FPM	Socket, Threaded





Nom.	SIZE	65mm	80mm	100mm	150mm	200mm	250mm	300mm
		(2-1/2")	(3")	(4")	(6")	(8")	(10")	(12")
n-øe	ANSI	4-ø19	4-ø19	8-ø19	8-ø22	8-ø22	12-ø25	12-ø25
	JIS	4-ø19	8-ø19	8-ø19	8-ø23	12-ø23	12-ø25	16-ø25
L		415	430	530	770	835	880	915
L1		265	280	380	620	685	730	765
D	ANSI	178	191	229	280	343	406	481
	JIS	175	185	210	280	330	400	445
D1	ANSI	140	152	191	241	298	362	432
	JIS	140	150	175	240	290	355	400
T	ANSI	24	25	28	32	36	42	42
	JIS	22	22	22	26	28	30	30

NO.	PART	MATERIAL	Q'TY
1	OUTER BODY	UPVC.CPVC	1
2	INNER BODY	UPVC.CPVC	1
3	FLANGE	UPVC.CPVC	2
4	UNION NUT	UPVC.CPVC	1
5	GLAND	UPVC.CPVC	1
6	O-RING	EPDM.FPM	2

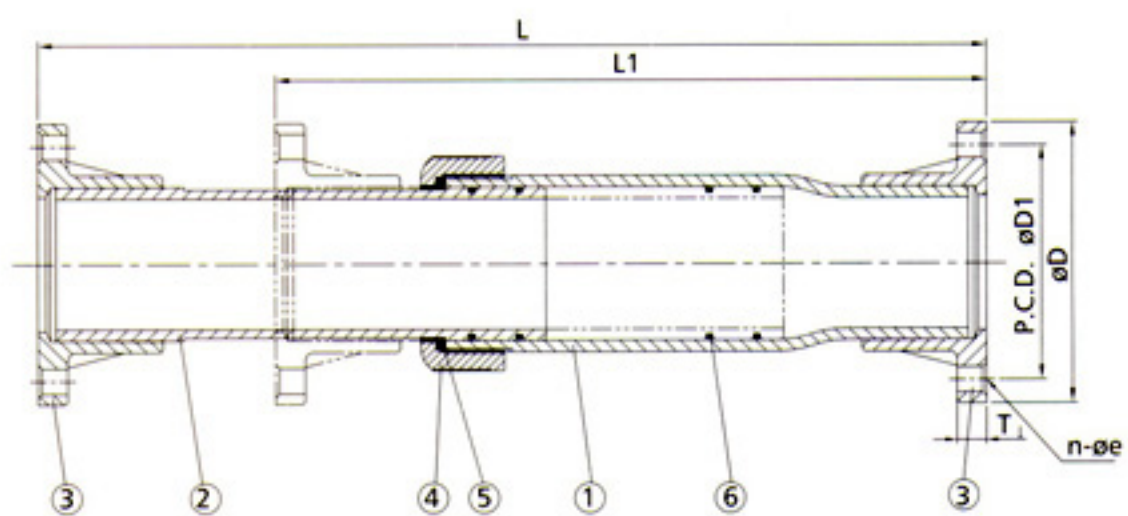

Nom.	SIZE	15mm	20mm	25mm	32mm	40mm	50mm
		(1/2")	(3/4")	(1")	(1-1/4")	(1-1/2")	(2")
D		46	54	64	76	76	89
ANSI	d2	21.23	26.57	33.27	42.04	48.11	60.17
	d1	21.54	26.87	33.65	42.42	48.56	60.63
	l	24	27.4	30.58	34.75	37.93	41.1
L		290	305	320	343	350	369
L1		150	150	150	150	150	150
d		21.3	26.7	33.4	42.2	48.3	60.3

NO.	PART	MATERIAL	Q'TY
1	BODY	UPVC.CPVC	1
2	SLIDER BLOCK	UPVC.CPVC	1
3	PIPE	UPVC.CPVC	1
4	REDUCING BUSHING	UPVC.CPVC	1
5	O-RING	EPDM.FPM	2
6	COUPLING	UPVC.CPVC	1

